

Ductile Iron Check Valve

Model 80DI




Flomatic Corporation

Sizes 3" thru 8" / 80 mm thru 200 mm



Materials

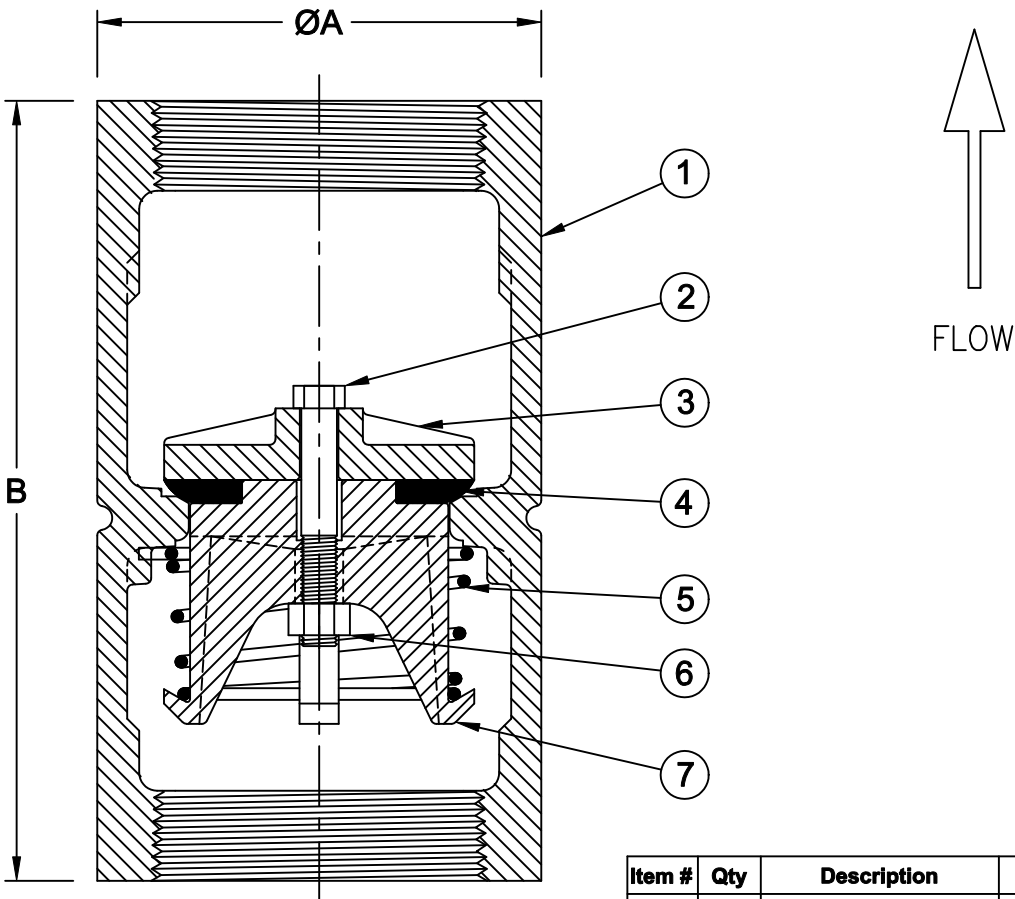

Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	65-45-12
2	1	Bolt	Stainless Steel	18-8
3	1	Dome (Epoxy Coated)	Ductile Iron	65-45-12
4	1	Rubber Disk	Buna-n	-----
5	1	Spring	Stainless Steel	302
6	1	Nut	Stainless Steel	18-8
7	1	Guide (Epoxy Coated)	Ductile Iron	65-45-12

Max Temp 180°F (82°C)
 3"-Max Pressure 400psi (24bar)
 4"-8"Max Pressure 600psi (42bar)

Dimensions

Size		Part #	A		B		Weight	
Inch	mm		Inch	mm	Inch	mm	lbs	kg
3	80	7938	4-5/8	117	8-1/8	206	15	9
4	100	7939	5-3/4	146	10-11/64	258	25	12
5	125	4088	6-3/4	171	13-5/8	346	46	21
6	150	4089	8	203	15-3/32	383	66	30
8	200	4090	9-5/8	244	15-7/8	403	92	42

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2011 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.



January 25, 2005
 Dwg No: S80di3-8 Rev: b (6/11)

FLOMATIC CORPORATION
 GLENS FALLS, N.Y. 12801
 PHONE (518) 761-9797
 FAX (518) 761-9798