

SNAP-ACTION CAST IRON SUMP/EFFLUENT PUMPS

APPLICATIONS

Ideal for average- to high-volume water and effluent removal in residential spaces such as basements, laundry facilities, and crawl spaces.


FEATURES & BENEFITS

- Automatic submersible cast iron sump/effluent pump
- 1-1/2" FNPT discharge
- Integrated snap-action float switch suitable for use in narrow basins (11" or greater)
- Solid float will never become waterlogged
- · Built-in rod protection prevents float from contacting basin
- Clog-resistant design (1/2" diameter semi-solids handling)
- 10' cord

Model	Item No.	UPC	HP	Volts	Amps	Discharge	Cord Length	Gallons Per Hour at Height 5' 10' 15' 20' 30'		Shut- Off	On/Off Levels	Basin Diameter			
RL-33SC	14942652	0 10121 14579 5	1/3	115	5	1-1/2" FNPT	10′	3200	3000	2500	2200	-	28′	On: 8"–11" Off: 2"–5"	11" or more
RL-50SC	14942653	0 10121 14580 1	1/2	115	6.5	1-1/2" FNPT	10′	4000	3420	3090	2800	1680	36'	On: 8"–11" Off: 2"–5"	11" or more

CARTON SPECIFICATIONS

Model	Length	Width	Height	Weight (lbs)	Carton Cubes (cu ft)	Pallet Quantity	Quantity per Layer	Layers per Pallet
RL-33SC	9.75"	11″	12.75"	27.75	0.79	48	16	3
RL-50SC	10.25"	11.50"	13.75"	28.46	0.94	36	12	3

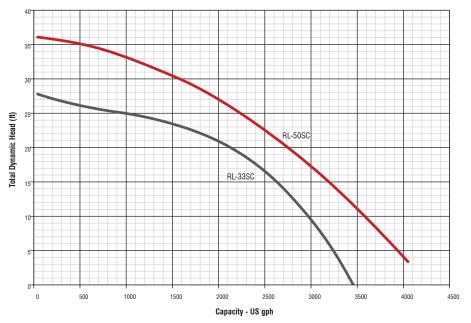

Snap-Action Sump/Effluent Pumps