quality . service innovation . integrity

Model 311



Features

The "Mighty Mover" is a portable, non-submersible utility pump designed for use in residential or light commercial dewatering applications and can be used to transfer unwanted water away from waterbeds, washing machines and water heaters or to add antifreeze to radiant heating lines. Each pump is built using non-corrodible materials, ensuring a long service life. Because they are both durable and lightweight, these pumps can be transported from one location or project to another very easily. The pump is self priming at 7 feet (2.1 meters) or less above the liquid source and can be used to lift water from 15 feet (5 meters) below the pump's location. With garden hose connections for the inlet and outlet, setup is simple. Each pump comes with an extra impeller, a gasket and one 6' (2 m) hose with a strainer.

Specifications

Motor Characteristics

115 V
1 Ph
60 Hz
1.7 Amps


Pump Characteristics

Operation	Nonautomatic
Discharge Size	Garden hose
Cord Length	6' (2 m) standard
Cord Type	Grounded plug
Max Head	39' (11.9 m)
Max Flow Rate	337 GPH (1275.7 LPH)
Max Operating Temp	130° F (54° C) water, 104° F (40° C) air
Cooling	Air





Model 311

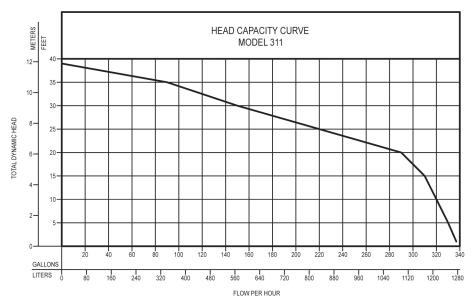

SK2176

Model

Model Number	Seal	Mode	Volts	Phase	Amps	CSA/UL	Hz	Lbs	Kg
311	Single	Non	115	1	1.7	N/Y	60	8	4

Your Peace of Mind is Our Top Priority® 3649 Cane Run Rd | Louisville, KY 40211 USA +1 502-778-2731 | 1-800-928-7867 | Fax: +1 502-774-3624 www.zoeller.com